


Corrugated wiring pipe PVC 750N - RKSS, RKSSP

	Reference documents:	PN-EN 61386-22
	Characteristics:	- Corrugated pipe, flexible, self-extinguishing - Flammability class: UL94: V-0, - Fire reaction class: PN-EN 13501-1:2019-02: B-s2, d0 - RKSSP pipe equipped with a metal wire
	Application:	Protection of electrical installations in construction and industry sector against mechanical factors, changes of temperature and moisture. Used in places with increased fire hazard public utility buildings, wooden structure buildings and attics. Pipes can be laid and poured with concrete (vibrated concrete).
	Material:	PVC
	Compressive strength:	750N
	Scope of temperatures:	-25°C ÷ 60°C
	Colour:	Gray
	Ø External diameter [mm]:	16*; 18*; 20*; 23*; 25*; 28*; 32*; 36; 40; 43; 50
	Length of coils [m]:	25; 50; 100

* innovative pipe



The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

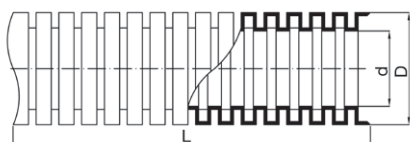

	Symbol	Ø D / d [mm]	L [m]		
			25	50	100
			index	index	index
Without wire	RKSS 16/12	16/12	10304	10305	
	RKSS 18/13,5	18/13,5	10307	10308	10309
	RKSS 20/16	20/16	10310	10311	10312
	RKSS 23/18	23/18	10313	10314	10315
	RKSS 25/20	25/20	10316	10317	10318
	RKSS 28/23	28/23	10319	10320	
	RKSS 32/26	32/26	10321	10322	
	RKSS 36/29	36/29	10323	10324	
	RKSS 40/34	40/34	10325	10326**	
	RKSS 43/36	43/36	10327	10328**	
	RKSS 50/43	50/43	10329		
With wire	RKSSP 16/12	16/12	10334	10335	
	RKSSP 18/13,5	18/13,5	10337	10338	10339
	RKSSP 20/16	20/16	10340	10341	10342
	RKSSP 23/18	23/18	10343	10344	10345
	RKSSP 25/20	25/20	10346	10347	10348
	RKSSP 28/23	28/23	10349	10350	
	RKSSP 32/26	32/26	10351	10352	
	RKSSP 36/29	36/29	10353	10354	
	RKSSP 40/34	40/34	10355	10356**	
	RKSSP 43/36	43/36	10357	10358**	
	RKSSP 50/43	50/43	10359		

* product available on request at the minimum production requirement