








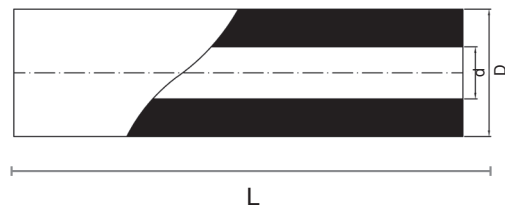
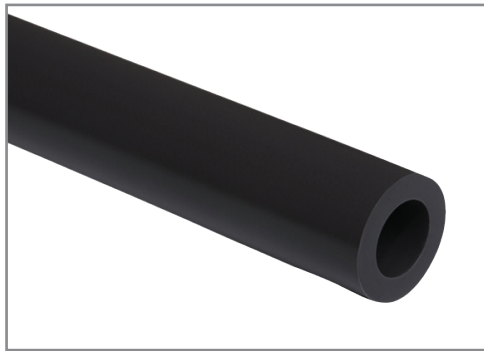


Rigid lightning protection pipe - GROM

	Reference documents:	PN-EN 62305 PN-EN 61386
	Characteristics:	•Rigid self-extinguishing pipe; flammability class (acc. to UL94): V-0 •It is characterized by colour durability and stability, even under conditions of continuous exposure to UV radiation
	Application:	Installation of lightning conductors in lightning protection installations Protection against the current flow effects during lightning strikes
	Material:	PVC modified
	Compressive strength:	1250N
	Impact resistance:	High
	Scope of temperatures: (transport, installation, exploitation)	-15°C ÷ 60°C
	Colour:	Dark grey
	Ø external [mm]:	20; 28; 32; 40
	Length of bars [m]:	3
	NOTES:	Possibility of producing a pipe in a different colour



Symbol	Ø D / d [mm]	Compressive strength	L [m]	index	item/pack
GROM 20/14	20/14	1250N	3	10792	10
GROM 28/22	28/22	1250N	3	10751	10
GROM 32/26	32/26	1250N	3	10750	10
GROM 40/34	40/34	1250N	3	10793	10