



## Wiring trunking - KK

	Reference documents:	PN-EN 50085
	Characteristics:	<ul style="list-style-type: none"> <li>• Self-extinguishing wiring trunking, flammability class (acc. to UL94): V-0</li> <li>• Fire class reaction (acc. to PN-EN 13501-1:2019-2): B-s2, d0</li> <li>• With perforated bottom</li> <li>• Covers of the wiring trunking are protected with a protective foil</li> <li>• It is characterized by increased durability and colour stability even under conditions of continuous exposure to UV radiation</li> </ul>
	Application:	Distribution and protection electrical wiring in pre-wall installations against humidity and mechanical damages
	Material:	PVC
	Scope of temperatures: (transport, installation, exploitation)	-15°C ÷ 60°C
	Colour:	White
	Sizes [mm]:	16x10; 17x15; 20x11; 20x18; 25x15; 32x15; 32x30; 40x25; 40x40; 50x18:2; 60x40; 60x60; 90x40; 90x60; 130x60
	Length [m]:	2

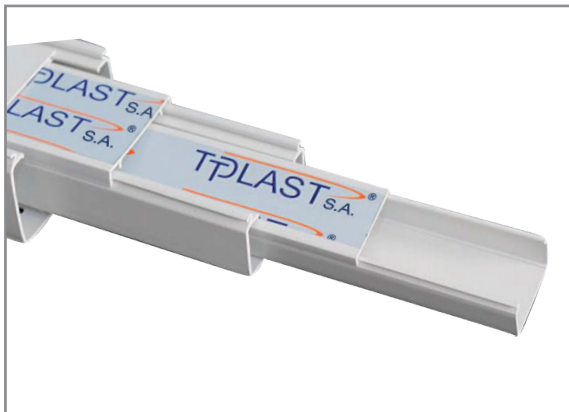

Symbol	W x H [mm]	Index	item / pack
KK 16X10	16 x 10	10257	40
KK 17X15	17 x 15	10258	40
KK 20X11	20 x 11	10259	40
KK 20X18	20 x 18	10260	40
KK 25X15	25 x 15	10261	30
KK 32X15	32 x 15	10263	30
KK 32X30	32 x 30	10264	28
KK 40X25	40 x 25	10265	24
KK 40X40	40 x 40	10268	20
KK 50X18:2	50 x 18	10269	30
KK 60X40*	60 x 40	10270	15
KK 60X60*	60 x 60	10331	12
KK 90X40*	90 x 40	10332	10
KK 90X60*	90 x 60	10333	8
KK 130x60*	130 x 60	10262	4

\* possibility of ordering a separator