
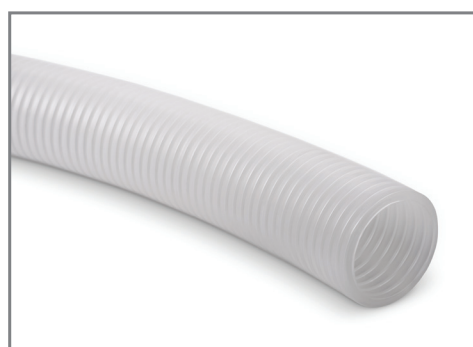


Corrugated wiring pipe PP- RKLf

	Reference documents:	PN-EN 61386
	Characteristics:	Corrugated flexible flammable pipe
	Application:	Protection electrical system in pre-wall installations against mechanical damages
	Material:	PP
	Compressive strength:	to 320N
	Scope of temperatures: (transport, installation, exploitation)	-5°C ÷ 90°C
	Colour:	Half transparent
	Ø external [mm]:	14; 16*; 18*; 20*; 23*; 25*; 28*; 32*; 36; 40; 43; 50
	Length of coils [m]:	25; 50; 100
	NOTES:	Possibility of producing a pipe in a different colour on request

* innovative pipes

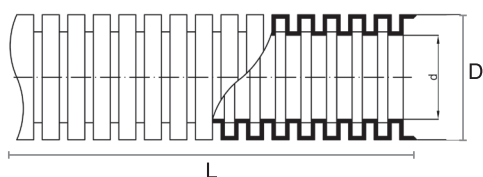

Symbol	Ø D / d [mm]	L [m]		
		25	50	100
		index	index	index
RKLf 14/9	14/9	10034		
RKLf 16/12	16/12	10040	10041	
RKLf 18/13,5	18/13,5	10043	10044	10045
RKLf 20/16	20/16	10046	10047	10048
RKLf 23/18	23/18	10052	10053	10054
RKLf 25/20	25/20	10055	10056	
RKLf 28/23	28/23	10058	10059	
RKLf 32/26	32/26	10060	10061	
RKLf 36/29	36/29	10062	10063	
RKLf 40/34	40/34	10070		
RKLf 43/36	43/36	10066		
RKLf 50/43	50/43	10069		

Corrugated wiring pipe I PP for special applications type 7 and type 10 (on request)

Symbol	index	L [m]
RKLf-typ 7*	12537	100
RKLf-typ 10*	12538	100

* innovative pipes