


## Halogen-free rigid wiring pipe 320N - RLHF

	Reference documents:	PN-EN 61386
	Characteristics:	Rigid fire retardant self-extinguishing pipe <ul style="list-style-type: none"> <li>• Halogen-free (meets the requirements of the standard concerning the quantity of toxic chemicals emitted during combustion)</li> <li>• Fire class reaction (acc. to PN-EN 13501-1:2019-2): C-s3, d0</li> </ul>
	Application:	Distribution and protection of electric wiring in pre-wall installation. Pipe meets requirements of the standard concerning the amount of toxic chemicals produced by a fire (a halogen-free product).
	Material:	PP modified
	Compressive strength:	320N
	Scope of temperatures: (transport, installation, exploitation)	-5°C ÷ 90°C
	Colour:	Grey
	Ø external [mm]:	16; 18; 20; 22; 25; 28; 32; 37; 47
	Length of coils [m]:	3

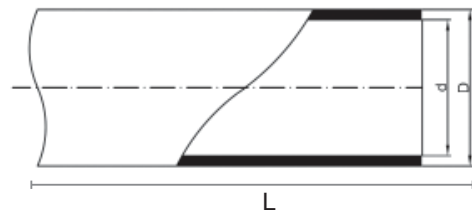

Ø D [mm]	L: 3 m		item / pack
	Gray		
	symbol	index	
16	RLHF 16	10406	20
18	RLHF 18	11053	20
20	RLHF 20	10408	20
22	RLHF 22	10410	20
25	RLHF 25	11653*	20
28	RLHF 28	10412	20
32	RLHF 32	11654*	10
37	RLHF 37	10414*	10
47	RLHF 47	10416*	10

\* product available on request