
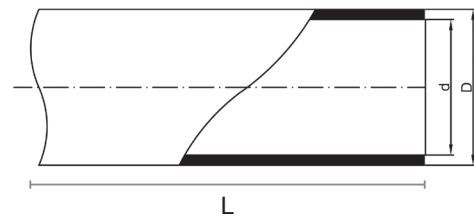


## Rigid wiring pipe PVC 320N - RL

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> <li>• Rigid fire retardant self-extinguishing pipe; flammability class: V-0</li> <li>• Fire class reaction (acc. to PN-EN 13501-1:2019-2): B-s2, d0</li> <li>• It is characterized by increased durability and colour stability, even under conditions of continuous exposure to UV radiation</li> </ul>
	Application:	Distribution and protection of electric wiring in pre-wall installation, both outside and inside the building.
	Material:	PVC
	Compressive strength:	320N
	Scope of temperatures: (transport, installation, exploitation)	-15°C ÷ 60°C
	Colour:	White, grey (RAL 7012)
	Ø external [mm]:	13; 16; 18; 20; 22; 25; 28; 32; 37; 40; 47; 50
	Length of bars [m]:	2; 3
	NOTES:	Possibility of producing a pipe in a different colour on request

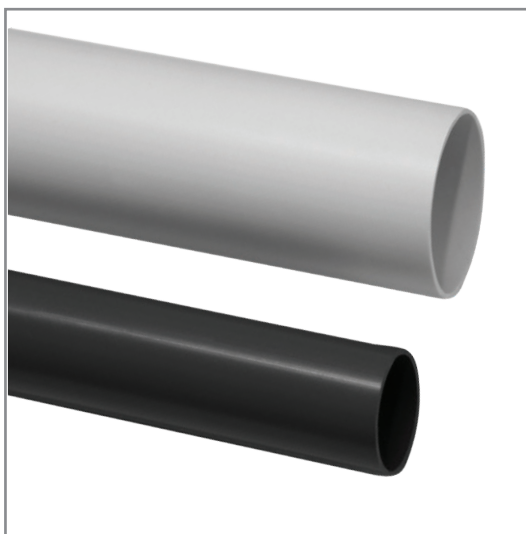

Ø D [mm]	L: 3 m				L: 2 m		item / pack
	White		Gray		White		
	symbol	index	symbol	index	symbol	index	
13	RL 13	10092	RL 13 SZ	10104	RL 13-2	33400	40
16	RL 16	10093	RL 16 SZ	10105	RL 16-2	33410	20
18	RL 18	10094	RL 18 SZ	10106	RL 18-2	33420	20
20	RL 20	10095	RL 20 SZ	10107	RL 20-2	33430	20
22	RL 22	10096	RL 22 SZ	10108	RL 22-2	33450	20
25	RL 25	10220	RL 25 SZ	10223	RL 25-2	11861*	20
28	RL 28	10098	RL 28 SZ	10110	RL 28-2	33460	20
32	RL 32	10099	RL 32 SZ	10111*	RL 32-2	11862*	10
37	RL 37	10100	RL 37 SZ	10112	RL 37-2	33470	10
40	RL 40	10101*	RL 40 SZ	10113*	RL 40-2	11845*	10
47	RL 47	10102	RL 47 SZ	10114	RL 47-2	33480	10
50	RL 50	10103*	RL 50 SZ	10115*	RL 50-2	11863*	10

\* product available on request