







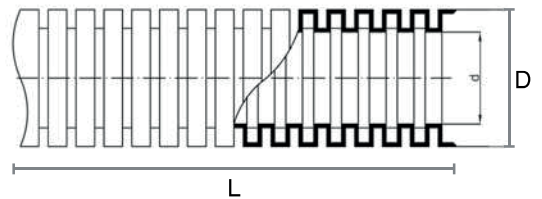
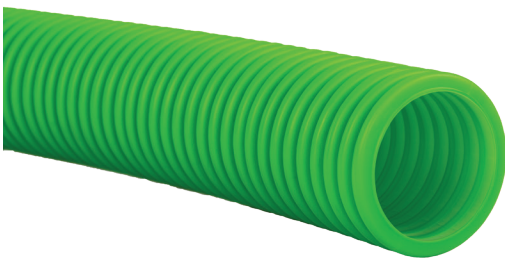


Three-layer structured ventilation pipe PE antistatic ROD-VENT-VX

	Reference documents:	PN-EN 13180:2004, Hygienic certificate B-BK-60212-0010/20
	PKWiU:	22.21.21.0
	Customs code:	3917 21 10
	Characteristics:	ROD-VENT-VX- - Pipe is characterized by a corrugated structure of the external layer and a smooth internal layer. To increase the antistatic qualities, a smooth internal layer has been enriched with a highly effective component reducing surface electrostatic tension. As a result, the effect of attracting dust particles to the inner walls is reduced.
	Application:	Routing ventilation ducts on the air supply and exhaust sides
	Material:	HDPE
	Compression strength:	450 N
	Scope of temperatures:	-25°C ÷ 90°C
	Colour:	Green on the outside, natural on the inside
	Ø external [mm]:	50; 63; 75; 90; 110; 160
	Length of coils [m]:	25; 50
	NOTES:	<ul style="list-style-type: none"> • the pipes can be made with custom prints • the pipes can be made in any colour and with different strength parameters



Symbol	Ø D / d [mm]	Compression strength	L [m]	index
ROD-VENT-VX 50/40	50/40	450N	50	11903
ROD-VENT-VX 63/52	63/52	450N	50	11908
ROD-VENT-VX 75/60	75/60	450N	50	11904
ROD-VENT-VX 90/76	90/76	450N	50	11907
ROD-VENT-VX 110/92	110/92	450N	50	11905
ROD-VENT-VX 160/134	160/134	450N	25	11906