







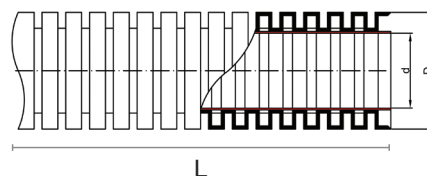
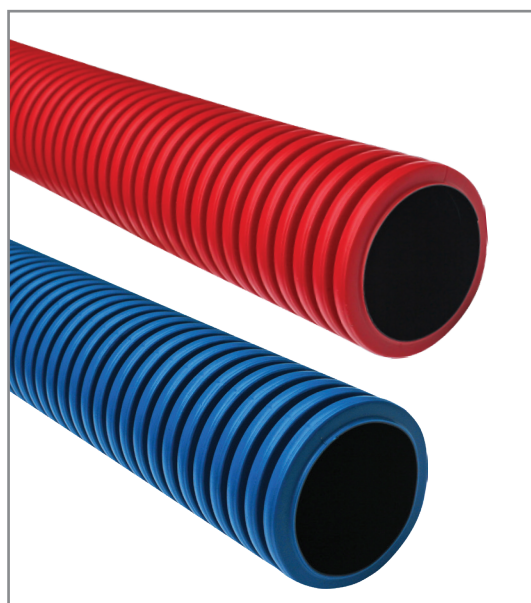


Corrugated double-wall pipe in bars - RODO

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> • Double wall pipe with corrugated external wall and smooth internal wall • In a set with a ZRD connector • Possibility of ordering a URD gasket ensuring tight connection
	Application:	Protection of cables in open trenches. Applied in construction of culverts under the transport routes (roads, track-ways, streets)
	Material:	HDPE
	Compressive strength:	450N, 750N
	Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
	Colour:	External: red or blue Internal: black
	Ø external [mm]:	50; 63; 75; 90; 110; 160; 232; 234
	Length of coils [m]:	6
	NOTES:	<ul style="list-style-type: none"> • Possibility of producing a pipe in a different colours • Possibility of producing a flame retardant pipe • Possibility of producing a pipe with other mechanical properties • Possibility of producing a UV resistant pipe



Symbol	Ø D / d [mm]	Compressive strength	L [m]	Colour		item/pack
				blue / black	red / black	
				index	index	
RODO 50/40	50/40	450N	6	10612	10608*	237
RODO 63/52	63/52	450N	6	11854*	11853*	149
RODO 75/60	75/60	450N	6	10613	10609*	131
RODO 90/76	90/76	450N	6	11374*	11373*	69
RODO 110/92	110/92	450N	6	10614	10610	48
RODO 160/134	160/134	450N	6	10615	10611	33
RODO 232/200	232/200	750N	6	11369*	11370	11
RODO 234/200	234/200	750N	6	11694*	11693*	11

* product available on request