


## Rigid split casing pipe - ROS-D

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> <li>• Rigit split pipe</li> <li>• It is installed through latching the lower and upper parts</li> </ul>
	Application:	Protection of existing cables. Repair of damaged cable ducts. Under communication routes: roads, trackways, streets.
	Material:	HDPE
	Compressive strength:	250N
	Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
	Colour:	External: red or blue Internal: black
	Ø external [mm]:	110; 160; 170
	Length of bars [m]:	3
	NOTES:	<ul style="list-style-type: none"> <li>• Possibility of producing a pipe in a different colour</li> <li>• Possibility of producing a flame-retardant pipe</li> <li>• Possibility of producing a pipe with different mechanical properties</li> <li>• Possibility of producing a pipe resistant to UV radiation</li> </ul>

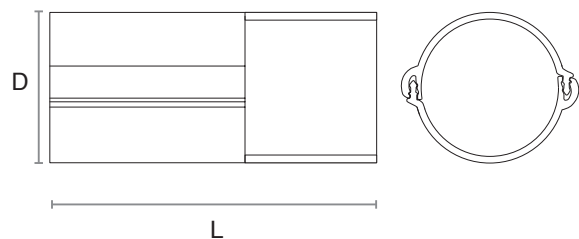

Symbol	Ø D [mm]	L [m]	Colour		item/pack
			red	blue	
			index	index	
ROS-D 110	110	3	11063	11062	43
ROS-D 160	160	3	11065	11064	28
ROS-D 170	170	3	11689*	11690*	28

\* product available on request