



Rigid casing pipe for ramming and drilling - colour - ROS-ZK (RHDPEp)

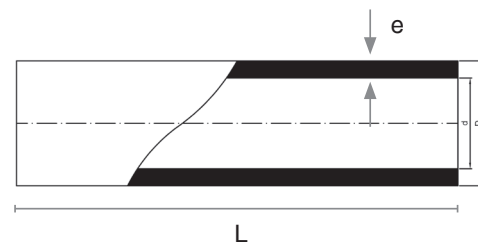

Reference documents:	PN-EN 61386
Characteristics:	<ul style="list-style-type: none"> • Rigid smooth casing pipe • Joint by welding or by means of ZROS, ZSROS connectors
Application:	Ramming and controller drilling. Cables protection in difficult terrain conditions. Applied as culverts under communication routes (roads, trackways, streets) and passing through water obstacles.
Material:	HDPE
Scope of temperatures: (transport, installation, exploitation):	-25°C ÷ 90°C
Colour:	External: red or blue Internal: black
Ø external [mm]:	110; 125; 160; 200; 225; 250
Length of bars [m]:	6, 12
NOTES:	<ul style="list-style-type: none"> • Possibility of producing a pipe in other colour • Possibility of producing a pipe in other wall thickness • Possibility of producing a flame-retardant pipe • Possibility of producing a pipe resistant to UV radiation

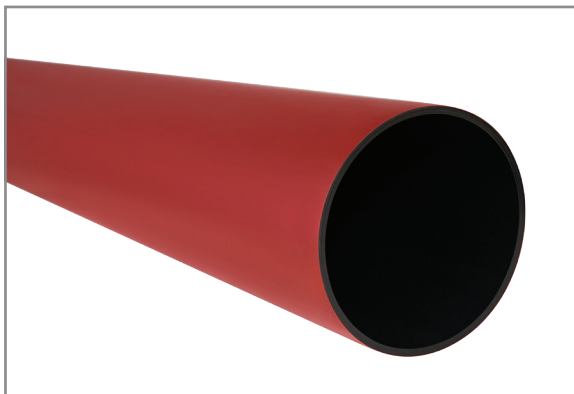

Symbol	Ø D [mm]	e [mm]	Compressive strength	Colour				item/pack
				red		blue		
				6 m index	12 m index	6 m index	12 m index	
ROS-Zk 110/6,3	110	6,3	750N	10980*	10981*	10982	10983*	48
ROS-Zk 110/10	110	10	1250N	10984*	10985*	10986*	10987*	48
ROS-Zk 125/7,1	125	7,1	1250N	10988*	10989*	10990*	10991*	38
ROS-Zk 125/11,4	125	11,4	4000N	10992*	10993*	10994*	10995*	38
ROS-Zk 160/9,1	160	9,1	1250N	10996	10997	10998*	10999*	33
ROS-Zk 160/14,6	160	14,6	4000N	11000*	11001*	11002*	11003*	20
ROS-Zk 200/11,4	200	11,4	1250N	11600*	11601*	11602*	11603*	14
ROS-Zk 200/18,2	200	18,2	1250N	11604*	11605*	11606*	11607*	14
ROS-Zk 225/12,8	225	12,8	1250N	11608*	11609*	11610*	11611*	11
ROS-Zk 225/20,5	225	20,5	1250N	11612*	11613*	11614*	11615*	11
ROS-Zk 250/14,2	250	14,2	1250N	11616*	11617*	11618*	11619*	11
ROS-Zk 250/22,7	250	22,7	1250N	11620*	11621*	11622*	11623*	11

* product available on request