



Rigid casing pipe connected via couplings - ROS-Zł (RHDPE)

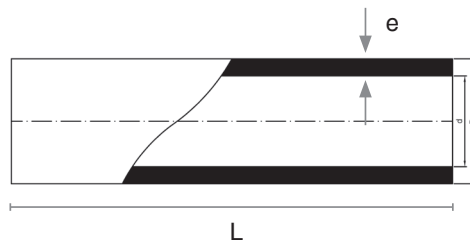

Reference documents:	PN-EN 61386
Characteristics:	<ul style="list-style-type: none"> • Rigid smooth casing pipe • Joint by means of ZROS, ZSROS connectors
Application:	Protection of cables in open trenches
Material:	HDPE
Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
Colour:	black
Ø external [mm]:	110; 125; 160
Length of bars [m]:	6, 12
NOTES:	<ul style="list-style-type: none"> • Possibility of producing a pipe in a different colour • Possibility of producing a pipe with different wall thickness • Possibility of producing a pipe with ROS-Zł-M socket in 6m bars • Possibility of producing a flame-retardant pipe • Possibility of producing a pipe resistant to UV radiation

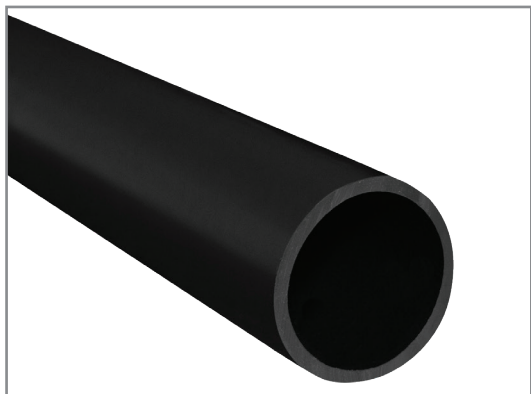

Symbol	Ø D [mm]	e [mm]	Compressive strength	L [m]		item/pack
				6 index	12 index	
ROS-Zł 110/3,7	110	3,7	250N	10970	10975*	48
ROS-Zł 110/5	110	5	450N	10971	10976*	48
ROS-Zł 110/6,3	110	6,3	750N	10972	10977*	48
ROS-Zł 110/10	110	10	1250N	11158*	11159*	48
ROS-Zł 125/7,1	125	7,1	1250N	11004*	11005*	38
ROS-Zł 125/11,4	125	11,4	4000N	11152*	11153*	38
ROS-Zł 160/9,1	160	9,1	1250N	10973	10978*	33
ROS-Zł 160/14,6	160	14,6	4000N	10974*	10979*	20

* product available on request