







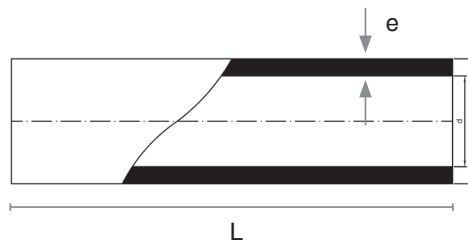
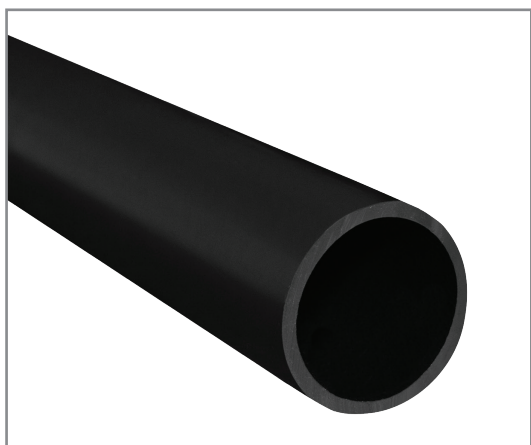


## Rigid casing pipe for ramming and drilling - ROS-Z (RHDPE)

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> <li>• Rigid smooth pipe</li> <li>• Joint by welding or by means of ZROS, ZSROS connectors</li> <li>• Ramming and controlled drilling</li> </ul>
	Application:	Cables protection in difficult terrain conditions. Culverts under communication routes with maximum transport loads (roads, trackways, streets). Passage through water obstacles.
	Material:	HDPE
	Scope of temperatures: (transport, installation, exploitation):	-25°C ÷ 90°C
	Colour:	black
	Ø external [mm]:	110; 125; 140; 160; 200; 225; 250
	Length of bars [m]:	6, 12
	NOTES:	Possibility of producing a pipe with other mechanical properties Possibility of producing a pipe resistant to UV radiation



Symbol	Ø D [mm]	e [mm]	Compressive strength	L [m]		item/pack
				6 index	12 index	
ROS-Z 110/6,3	110	6,3	750N	10712	10713*	48
ROS-Z 110/10	110	10	1250N	10710*	10711*	48
ROS-Z 125/7,1	125	7,1	1250N	10880	10881*	38
ROS-Z 125/11,4	125	11,4	4000N	10882*	10883*	38
ROS-Z 140/8	140	8	1250N	11127*	11139*	38
ROS-Z 140/12,7	140	12,7	1250N	11128*	11140*	38
ROS-Z 160/9,1	160	9,1	1250N	10716	10717	33
ROS-Z 160/9,4	160	9,4	1250N	11012*	11013*	33
ROS-Z 160/14,6	160	14,6	4000N	10714*	10715*	20
ROS-Z 200/11,4	200	11,4	1250N	11357	11358*	14
ROS-Z 200/18,2	200	18,2	1250N	11359*	11360*	14
ROS-Z 225/12,8	225	12,8	1250N	11361	11362*	11
ROS-Z 225/20,5	225	20,5	1250N	11363*	11364*	11
ROS-Z 250/14,2	250	14,2	1250N	11365*	11366*	11
ROS-Z 250/22,7	250	22,7	1250N	11367*	11368*	11

\* product available on request