


Connection rigid pipe UV with a compensation socket - MOST - RPS-UV-M* (RHDPE)

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> • Rigid smooth pipe • Resistant to UV radiation • Ended with a compensation socket (+/-18 cm)
	Application:	Cable protection in open spaces: poles, walls of buildings, viaducts, bridges.
	Material:	HDPE with the addition of a UV stabilizer
	Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
	Colour:	Black
	Ø external [mm]:	110; 160
	Length of bars [m]:	6
	NOTES:	• Possibility of making a pipe in a different color

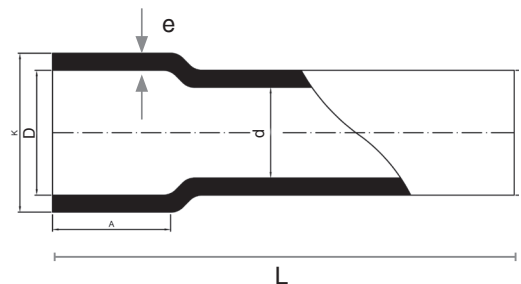

Symbol	Ø D [mm]	e [mm]	Compressive strength	L [m]	index	item/pack
RPS-UV-M* 110/5,5	110	5,5	750N	6	11113*	50
RPS-UV-M* 160/8	160	8	750N	6	11112*	21
RPS-UV-Mt* 110/5,5	110	5,5	750N	6	11130*	50
RPS-UV-Mt* 160/8	160	8	750N	6	11129*	21

* product available on request
t* - flame-retardant pipe