
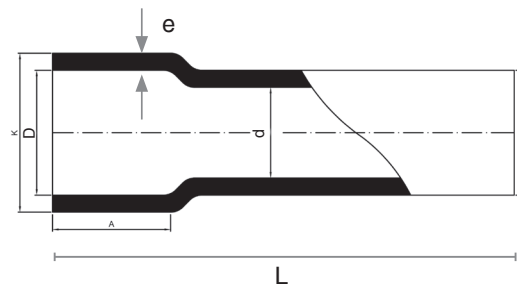


Connection rigid pipe UV with socket RPS-UV-M (RHDPE)

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> • Rigid smooth pipe • Resistant to UV radiation • Ended with socket
	Application:	Cable protection in open spaces: poles, walls of buildings, viaducts, bridges
	Material:	HDPE with the addition of a UV stabilizer
	Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
	Colour:	Black
	Ø external [mm]:	32; 50; 63; 75; 110; 160
	Length of bars [m]:	3, 6
	NOTES:	<ul style="list-style-type: none"> • Possibility of making a flame-retardant pipe • Possibility of making a pipe in a different color

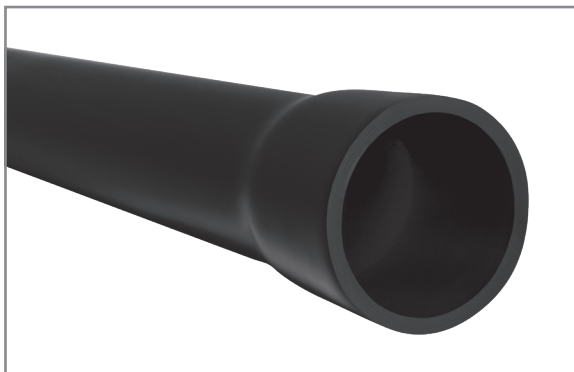

Symbol	Ø D [mm]	e [mm]	Compressive strength	L [m]		item/pack
				3	6	
				index	index	
RPS-UV-M 32/3	32	3	750N	10679	10678	345
RPS-UV-M 50/3,5	50	3,5	750N	10680	10681	220
RPS-UV-M 50/5	50	5	750N	10682	10683	220
RPS-UV-M 63/6	63	6	750N	11137*	11138*	149
RPS-UV-M 75/4	75	4	450N	10684	10685	120
RPS-UV-M 75/7	75	7	750N	10686	10687	120
RPS-UV-M 110/4	110	4	450N	11006	11007	50
RPS-UV-M 110/5,5	110	5,5	750N	10690	10691	50
RPS-UV-M 110/10	110	10	1250N	10688*	10689	50
RPS-UV-M 160/14,5	160	14,5	4000N	10692	10693	21

* product available on request