


Connection rigid pipe UV - RPS-UV (RHDPE)

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> • Rigid smooth pipe • Resistant to UV radiation
	Application:	Cable protection in open spaces: poles, walls of buildings, viaducts, bridges
	Material:	HDPE with the addition of a UV stabilizer
	Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
	Colour:	Black
	Ø external [mm]:	32; 50; 63; 75; 110; 160
	Length of bars [m]:	3, 6
	NOTES:	• Possibility of making a flame-retardant pipe

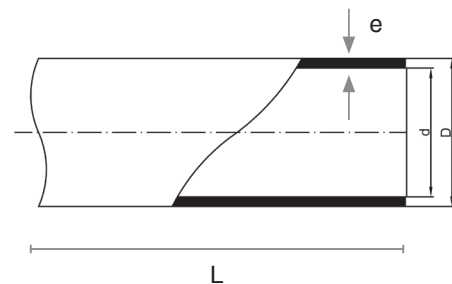

Symbol	Ø D [mm]	e [mm]	Compressive strength	L [m]		item/pack
				3 index	6 index	
RPS-UV 32/3	32	3	750N	10694	11131	360
RPS-UV 50/3,5	50	3,5	750N	11132	11133*	237
RPS-UV 50/5	50	5	750N	10695	11134*	237
RPS-UV 63/6	63	6	750N	10699	11009*	149
RPS-UV 75/4	75	4	450N	10700	11114*	131
RPS-UV 75/7	75	7	750N	10696	11135*	131
RPS-UV 110/4	110	4	450N	11008	11116*	57
RPS-UV 110/5,5	110	5,5	750N	11680*	11681*	57
RPS-UV 110/10	110	10	1250N	10697	11136*	57
RPS-UV 160/14,5	160	14,5	4000N	10698	11115*	20

* product available on request