







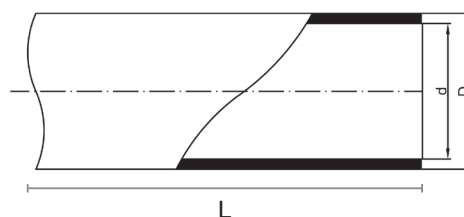


Halogen-free rigid wiring pipe 750N - RSHF

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> • Rigid fire retardant self-extinguishing pipe • Halogen-free (meets the requirements of the standard concerning the quantity of toxic chemicals emitted during combustion) • Fire class reaction (acc. to PN-EN 13501-1:2019-2): C-s3, d0
	Application:	Distribution and protection of electric wiring in pre-wall installation. Pipe meets requirements of the standard concerning the amount of toxic chemicals produced by a fire (a halogen-free product)
	Material:	PP modified
	Compressive strength:	750N
	Scope of temperatures: (transport, installation, exploitation)	-5°C ÷ 90°C
	Colour:	Grey
	Ø Ø external [mm]:	16; 20; 22; 28; 37; 47
	Length of coils [m]:	3



Ø D [mm]	L: 3 m		item / pack
	Gray		
	symbol	index	
16	RSHF 16	10760*	20
20	RSHF 20	10761*	20
22	RSHF 22	10762*	20
28	RSHF 28	10763*	20
37	RSHF 37	10764*	10
47	RSHF 47	10765*	10

* product available on request