







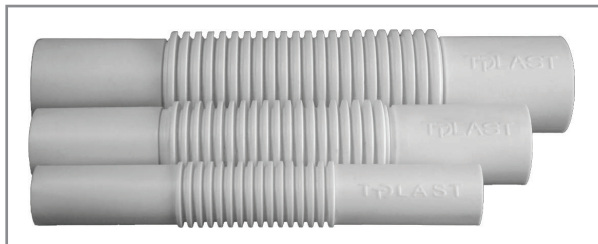


Compensation coupling PVC - ZCL

	Reference documents:	PN-EN 61386
	Characteristics:	<ul style="list-style-type: none"> • Compensation coupling, self-extinguishing, flammability class: V-0, • Fire class reaction (acc. to PN-EN 13501-1:2019-2): B-s2, d0 • It is characterized by increased durability and colour stability even under conditions of continuous exposure to UV radiation
	Application:	Fastening system for RL and RS electrical system rigid pipes
	Material:	PVC
	Scope of temperatures: (transport, installation, exploitation)	-15°C ÷ 60°C
	Colour:	White, grey (RAL 7012)
	Sizes [mm]:	13; 16; 18; 20; 22; 25; 28; 32; 37; 40; 47; 50
	NOTES:	Possibility of preparing a connecting piece in a different colour on request



Size [mm]	White		Gray		Item / pack
	symbol	index	symbol	index	
13	ZCL PVC 13	10116	ZCL PVC 13 SZ	10124	100
16	ZCL PVC 16	10117	ZCL PVC 16 SZ	10125	100
18	ZCL PVC 18	10118	ZCL PVC 18 SZ	10126	100
20	ZCL PVC 20	10119	ZCL PVC 20 SZ	10127	100
22	ZCL PVC 22	10120	ZCL PVC 22 SZ	10128	100
25	ZCL PVC 25	10634	ZCL PVC 25 SZ	10140*	100
28	ZCL PVC 28	10121	ZCL PVC 28 SZ	10129	100
32	ZCL PVC 32	10635	ZCL PVC 32 SZ	10664*	50
37	ZCL PVC 37	10122	ZCL PVC 37 SZ	10130	50
40	ZCL PVC 40	10636*			50
47	ZCL PVC 47	10123	ZCL PVC 47 SZ	10131	50
50	ZCL PVC 50	10637*	ZCL PVC 50 SZ	10638*	50

* product available on request