


Corrugated double-wall pipe in coils - RODK

	Reference documents:	PN-EN 61386
	Characteristics:	- Corrugated double wall pipe (external and internal); flexible pipe - Equipped with a pulling wire - In a set with ZRD connector - Possibility of ordering a URD gasket ensuring tight connection
	Application:	Protection of cables in open trenches. Telecommunication cable sewage system. Places with small mechanical loads (sidewalks, green areas).
	Material:	HDPE
	Compressive strength:	450N
	Scope of temperatures: (transport, installation, exploitation)	-25°C ÷ 90°C
	Colour:	External: red or blue Internal: black
	Ø external [mm]:	40; 50; 63; 75; 90; 110; 160
	Length of coils [m]:	25, 50
	NOTES:	- Possibility of producing a pipe in a different colour on request - Possibility of producing a flame retardant pipe - Possibility of producing a pipe with other mechanical properties - Possibility of producing a UV resistant pipe

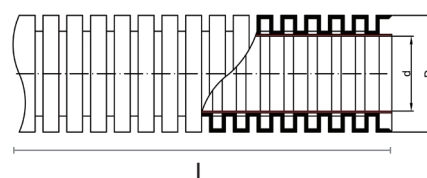

Symbol	Ø D / d [mm]	Compressive strength	L [m]	Colour	
				blue / black	red / black
				index	index
RODK 40/32	40/32	450N	25	11188*	
RODK 40/32	40/32	450N	50	10599	
RODK 50/40	50/40	450N	25	10619	10618*
RODK 50/40	50/40	450N	50	10601	10600*
RODK 63/52	63/52	450N	25	11851*	11849*
RODK 63/52	63/52	450N	50	11852*	11850*
RODK 75/60	75/60	450N	25	10621	10620*
RODK 75/60	75/60	450N	50	10603	10602*
RODK 90/76	90/76	450N	25	11352*	11354*
RODK 90/76	90/76	450N	50	11351*	11353*
RODK 110/92	110/92	450N	25	10617	10616*
RODK 110/92	110/92	450N	50	10605	10604
RODK 160/134	160/134	450N	25	10607	10606

* product available on request