


Rigid wiring pipe with a socket PVC 320N - RL-M

	Reference documents:	PN-EN 61386-21
	Characteristics:	- Rigid pipe ended with a socket, flammability class V-0, self-extinguishing - Fire reaction class: PN-EN 13501-1:2019-02: B-s2, d0 - Characterised by increased durability and colour stability even in conditions of continuous exposure to UV radiation
	Application:	Distribution and protection of electric wiring pipe in pre-wall installations outside and inside the building.
	Material:	PVC
	Compressive strength:	320N
	Scope of temperatures:	-25°C ÷ 60°C
	Colour:	White
	Ø External diameter [mm]:	13; 16; 18; 20; 22; 25; 28; 32; 37; 40; 47; 50
	Length of bars [m]:	2; 3
	NOTES:	Possibility of producing pipe in a different colour on request

The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

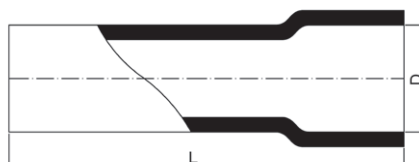

Ø D [mm]	📏 L: 3m		📏 L: 2m		📦 Item / pack
	White		White		
	Symbol	📏 index	Symbol	📏 index	
13	RL-M 13	12728*	RL-M 13-2	12740*	40
16	RL-M 16	12729	RL-M 16-2	12741	20
18	RL-M 18	12730	RL-M 18-2	12742	20
20	RL-M 20	12731	RL-M 20-2	12743	20
22	RL-M 22	12732	RL-M 22-2	12744	20
25	RL-M 25	12733*	RL-M 25-2	12745*	20
28	RL-M 28	12734	RL-M 28-2	12746	20
32	RL-M 32	12735*	RL-M 32-2	12747*	10
37	RL-M 37	12736	RL-M 37-2	12748	10
40	RL-M 40	12737*	RL-M 40-2	12749*	10
47	RL-M 47	12738	RL-M 47-2	12750	10
50	RL-M 50	12739*	RL-M 50-2	12751*	10

* product available on request at the minimum production requirement