












Corrugated wiring pipe PP - RKLF

	Reference documents:	PN-EN 61386-22
	Characteristics:	Corrugated pipe, flexible, flammable
	Application:	Protection of electrical wires in concealed installations against mechanical damage.
	Material:	PP
	Compressive strength:	Up to 320N
	Scope of temperatures:	-5°C ÷ 90°C
	Colour:	Half – transparent
	Ø External diameter [mm]:	14; 16*; 18*; 20*; 23*; 25*; 28*; 32*; 36; 40; 43; 50
	Length of coils [m]:	25; 50; 100
	NOTES:	Possibility of producing pipe in a different colour on request


* innovative pipe

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

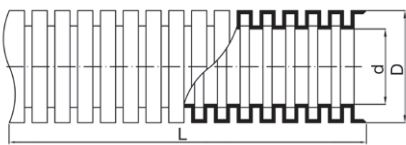

Symbol	Ø D / d [mm]	L [m]		
		25	50	100
		 index	 index	 index
RKLF 14/9	14/9	10034		
RKLF 16/12	16/12	10040	10041	
RKLF 18/13,5	18/13,5	10043	10044	10045
RKLF 20/16	20/16	10046	10047	10048
RKLF 23/18	23/18	10052	10053	10054
RKLF 25/20	25/20	10055	10056	
RKLF 28/23	28/23	10058	10059	
RKLF 32/26	32/26	10060	10061	
RKLF 36/29	36/29	10062	10063	
RKLF 40/34	40/34	10070		
RKLF 43/36	43/36	10066		
RKLF 50/43	50/43	10069		

Corrugated electrical installation pipe for special applications PP: type 7 and type 10 (on request)

Symbol	 index	Ø d / D [mm]	L [m]
RKLF-typ 7*	12537	7/10	100
RKLF-typ 10*	12538	10/13	100

* innovative pipe