


Corrugated halogen - free wiring pipe 750N - RKSSHF, RKSSHFP

	Reference documents:	PN-EN 61386-22
	Characteristics:	<ul style="list-style-type: none"> • Corrugated, flexible, flame retardant, self-extinguishing, halogen-free pipe (fulfills requirements concerning quantity of toxic chemical compounds released during combustion) • Fire reaction class: PN-EN 13501-1:2019-02: C-s3, d0 • RKSSHFP pipe equipped with a metal wire
	Application:	Protection of electric wires in flush - mounted and wall mounted installations. Recommended in places with increased fire hazard and in places concerning the stricter requirements for toxic chemical produced by a fire (halogen-free product).
	Material:	PP modified
	Compressive strength:	750N
	Scope of temperatures:	-5°C ÷ 90°C
	Colour:	Milky
	Ø External diameter [mm]:	16; 20; 25; 32; 40; 50
	Length of coils [m]:	25; 50
	NOTES:	Possibility of producing pipe in a different colour on request

The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

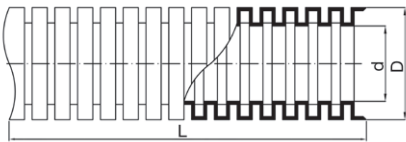

	Symbol	Ø D / d [mm]	L [m]	
			25	50
			index	index
Without wire	RKSSHF 16/12	16/12		10071
	RKSSHF 20/16	20/16		10074
	RKSSHF 25/20	25/20		10077
	RKSSHF 32/26	32/26		10080
	RKSSHF 40/34	40/34		10082
	RKSSHF 50/43	50/43	10089	
With wire	RKSSHFP 16/12	16/12		11648
	RKSSHFP 20/16	20/16		11055
	RKSSHFP 25/20	25/20		11649
	RKSSHFP 32/26	32/26		11650
	RKSSHFP 40/34	40/34		11651
	RKSSHFP 50/43	50/43	11652	

* product available on request at the minimum production requirement