








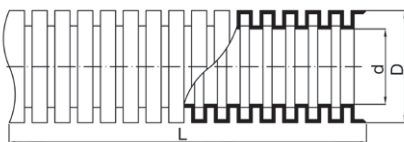


Corrugated wiring UV - resistant pipe - RKSSUV, RKSSUVP

	Reference documents:	PN-EN 61386-22
	Characteristics:	<ul style="list-style-type: none"> • Corrugated, flexible, UV resistant ,self-extinguishing pipe • Flammability class: UL94: V-0, • Fire reaction class: PN-EN 13501-1:2019-2: B-s2, d0 • RKSSUVP pipe equipped with a metal wire
	Application:	Protection of electrical wires against mechanical factors, temperature, UV radiation, moisture in flush-mounted and wall mounted installations (inside or outside the building) in moderate climate.
	Material:	PVC with UV stabilizer
	Compressive strength:	750 N
	Scope of temperatures:	-15°C ÷ 60°C
	Colour:	Black
	Ø External diameter [mm]:	16; 20; 25; 32; 40
	Length of coils [m]:	50

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.



	Symbol	Ø D / d [mm]	△ L [m]
			50
			☐ index
Without wire	RKSSUV 16/12	16/12	12458
	RKSSUV 20/16	20/16	12460
	RKSSUV 25/20	25/20	12462
	RKSSUV 32/26	32/26	12464
	RKSSUV 40/34	40/34	12465
With wire	RKSSUVP 16/12	16/12	12466
	RKSSUVP 20/16	20/16	12468
	RKSSUVP 25/20	25/20	12470
	RKSSUVP 32/26	32/26	12472
	RKSSUVP 40/34	40/34	12473