








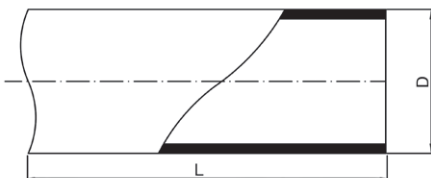


Rigid wiring halogen-free pipe 320N - RLHF

| | | |
|--|---------------------------|---|
|  | Reference documents: | PN-EN 61386-21 |
|  | Characteristics: | <ul style="list-style-type: none"> Rigid pipe, flame retardant, self-extinguishing, halogen-free (fulfills requirements regarding the amount of toxic chemical compounds released during combustion) Fire reaction class: PN-EN 13501-1:2019-02: C-s3, d0 |
|  | Application: | Distribution and protection of electric wires in wall installations, flush-mounted installations, plaster walls, wooden surfaces. Recommended in places with a special degree of fire protection and in places with stricter requirements for toxic chemicals (halogen-free product). |
|  | Material: | PP modified |
|  | Compressive strength: | 320N |
|  | Scope of temperatures: | -5°C ÷ 90°C |
|  | Colour: | Gray |
|  | Ø External diameter [mm]: | 16; 18; 20; 22; 25; 28; 32; 37; 47 |
|  | Length of bars [m]: | 3 |

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.



| Ø D [mm] | L: 3m | | Item / pack |
|----------|---------|--------|-------------|
| | Gray | | |
| | Symbol | index | |
| 16 | RLHF 16 | 10406 | 20 |
| 18 | RLHF 18 | 11053 | 20 |
| 20 | RLHF 20 | 10408 | 20 |
| 22 | RLHF 22 | 10410 | 20 |
| 25 | RLHF 25 | 11653 | 20 |
| 28 | RLHF 28 | 10412 | 20 |
| 32 | RLHF 32 | 11654 | 10 |
| 37 | RLHF 37 | 10414 | 10 |
| 47 | RLHF 47 | 10416* | 10 |

* product available on request at the minimum production requirement