












Corrugated double-wall pipe in coils - RODK

	Reference documents:	PN-EN 61386-24
	Characteristics:	<ul style="list-style-type: none"> • Double-wall, flexible pipe with corrugated external and internal wall • Equipped with pulling wire • ZRD connector included • Possibility to order URD gasket to ensure connection tightness
	Application:	Protection of cables in open trenches. Used in places with low mechanical loads (pavements, green areas).
	Material:	HDPE
	Compressive strength:	450N
	Scope of temperatures:	-30°C ÷ 90°C
	Colour:	External: red or blue Internal: black
	Ø External diameter [mm]:	40; 50; 63; 75; 90; 110; 125; 160
	Length of coils [m]:	25; 50
	NOTES:	Possibility of producing pipe in a different colour

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

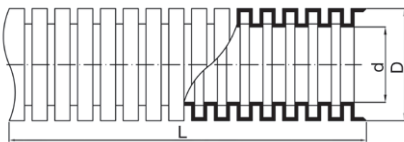

Symbol	Ø D / d [mm]	Compressive strength	L [m]	Colour	
				blue / black	red / black
				 index	 index
RODK 40/32	40/32	450N	25	11188	12677*
RODK 40/32	40/32	450N	50	10599	12676*
RODK 50/40	50/40	450N	25	10619	10618*
RODK 50/40	50/40	450N	50	10601	10600*
RODK 63/52	63/52	450N	25	11851*	11849*
RODK 63/52	63/52	450N	50	11852*	11850*
RODK 75/60	75/60	450N	25	10621	10620*
RODK 75/60	75/60	450N	50	10603	10602*
RODK 90/76	90/76	450N	25	11352*	11354*
RODK 90/76	90/76	450N	50	11351*	11353*
RODK 110/92	110/92	450N	25	10617	10616*
RODK 110/92	110/92	450N	50	10605	10604
RODK 125/105	125/105	450N	25	12959*	12960*
RODK 160/134	160/134	450N	25	10607	10606

* product available on request at the minimum production requirement