












## Cable protective non pressure pipe - colour - ROS-Zk

	Reference documents:	PN-EN 61386-24
	Characteristics:	<ul style="list-style-type: none"> <li>Rigid, smooth pipe</li> <li>Connected by welding or by means of ZROS, ZSROS connectors</li> </ul>
	Application:	Protection of cables in difficult conditions. Used as culverts under communication routes with maximum transport loads and as passages through water obstacles.
	Material:	HDPE
	Compressive strength:	750N, 1250N, 4000N
	Scope of temperatures:	-30°C ÷ 90°C
	Colour:	External: red or blue Internal: black
	Ø External diameter [mm]:	110; 125; 140; 160; 180; 200; 225; 250; 280; 315; 355; 400; 450; 500; 560; 630
	Length of bars [m]:	6; 12
	NOTES:	<ul style="list-style-type: none"> <li>Possibility of producing pipe in a different colour</li> <li>Possibility of producing pipe in other strength parameters</li> </ul>

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

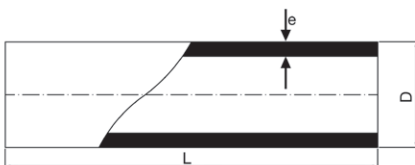

Symbol	Ø D [mm]	e [mm]	Compressive strength	Colour red / black		Item / pack
				6m	12m	
				 index	 index	
ROS-Zk 110/6,3 SDR 17,6	110	6,3	750N	12870*	12869*	48
ROS-Zk 110/10 SDR 11	110	10	1250N	12872*	12873*	48
ROS-Zk 125/7,1 SDR 17,6	125	7,1	1250N	12874*	12875*	38
ROS-Zk 125/7,4 SDR 17	125	7,4	1250N	12876*	12849*	38
ROS-Zk 125/11,4 SDR 11	125	11,4	1250N	12877*	12878*	38
ROS-Zk 140/8,0 SDR 17,6	140	8,0	1250N	12882*		38
ROS-Zk 140/8,3 SDR 17	140	8,3	1250N	12883*	12884*	38
ROS-Zk 160/9,1 SDR 17,6	160	9,1	4000N	12885*	12788*	33
ROS-Zk 160/9,5 SDR 17	160	9,5	4000N	12886*	12790*	33
ROS-Zk 160/14,6 SDR 11	160	14,6	4000N	12887*	12848*	20
ROS-Zk 180/10,7 SDR 17	180	10,7	1250N	12888*	12889*	28
ROS-Zk 180/16,4 SDR 11	180	16,4	1250N	12890*	12891*	28

\* product available on request at the minimum production requirement