












Rigid connection UV resistant pipe with a socket - RPS-UV-M

	Reference documents:	PN-EN 61386-24
	Characteristics:	<ul style="list-style-type: none"> • Rigid, smooth pipe • UV resistant • Ended with a socket
	Application:	Used to protect cables in open spaces on poles, building walls, viaducts and bridges.
	Material:	HDPE with added UV stabilizer
	Compressive strength:	450N, 750N, 1250N, 4000N
	Scope of temperatures:	-30°C ÷ 90°C
	Colour:	Black
	Ø External diameter [mm]:	32; 50; 63; 75; 110; 160
	Length of bars [m]:	3; 6
	NOTES:	Possibility of producing pipe in a different colour

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

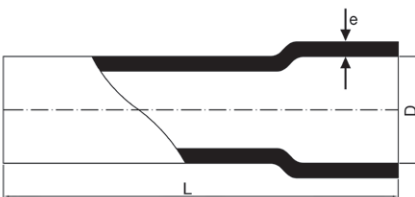

Symbol	Ø D [mm]	e [mm]	Compressive strength	L [m]		Item / pack
				3	6	
				 index	 index	
RPS-UV-M 32/3	32	3	750N	10679	10678	345
RPS-UV-M 50/3,5	50	3,5	750N	10680	10681	220
RPS-UV-M 50/5	50	5	750N	10682	10683	220
RPS-UV-M 63/6	63	6	750N	11137*	11138*	149
RPS-UV-M 75/4	75	4	450N	10684	10685	60
RPS-UV-M 75/7	75	7	750N	10686	10687	60
RPS-UV-M 110/4	110	4	450N	11006	11007	50
RPS-UV-M 110/5,5	110	5,5	750N	10690	10691	50
RPS-UV-M 110/10	110	10	1250N	10688*	10689	50
RPS-UV-M 160/8	160	8	750N	11685*	11684*	35
RPS-UV-M 160/14,5	160	14,5	4000N	10692	10693	21

* product available on request at the minimum production requirement