












Rigid wiring pipe PVC 750N - RS

	Reference documents:	PN-EN 61386-21
	Characteristics:	<ul style="list-style-type: none"> Rigid pipe, flammability class V-0, self-extinguishing Fire reaction class: PN-EN 13501-1:2019-02: B-s2, d0 Characterised by increased durability and colour stability even in conditions of continuous exposure to UV radiation
	Application:	Distribution and protection of electric wires in wall installations outside and inside the building.
	Material:	PVC
	Compressive strength:	750N
	Scope of temperatures:	-15°C ÷ 60°C
	Colour:	White, Gray (RAL 7012)
	Ø External diameter [mm]:	13; 16; 18; 20; 22; 25; 28; 32; 37; 40; 47; 50
	Length of bars [m]:	3
	NOTES:	Possibility of producing pipe in a different colour on request

 The manufacturer's recommendations regarding the product's installation temperature are available in the warranty card.

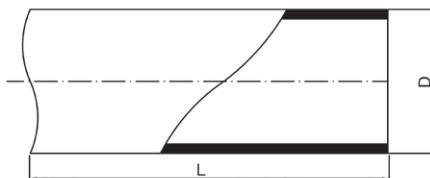

Ø D [mm]	L: 3m				Item / pack
	White		Gray		
	Symbol	 index	Symbol	 index	
13	RS 13	10766*	RS 13 SZ	10848*	40
16	RS 16	10767*	RS 16 SZ	10849*	20
18	RS 18	10768*	RS 18 SZ	10850*	20
20	RS 20	10769*	RS 20 SZ	10851*	20
22	RS 22	10770*	RS 22 SZ	10852*	20
25	RS 25	10771*	RS 25 SZ	10853*	20
28	RS 28	10772*	RS 28 SZ	10854*	20
32	RS 32	10773*	RS 32 SZ	10855*	10
37	RS 37	10774*	RS 37 SZ	10856*	10
40	RS 40	10775*	RS 40 SZ	10857*	10
47	RS 47	10776*	RS 47 SZ	10858*	10
50	RS 50	10777*	RS 50 SZ	10859*	10

* product available on request at the minimum production requirement