


## \*Double-layer corrugated system pipes for ground-coupled heat exchangers - HDPE

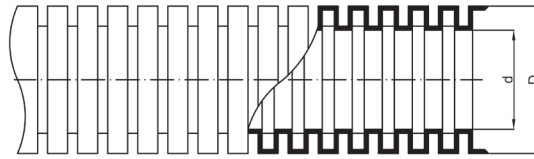

	<b>Reference documents:</b>	PN-EN 13476-3+A1; PN-EN 16798
	<b>PKWiU [Polish Classification of Products and Services]::</b>	22.21.21.0
	<b>Customs code::</b>	3917 21 10
	<b>Properties:</b>	- antibacterial, - antifungal
	<b>Application:</b>	ground-coupled heat exchangers: - tube heat exchanger - air heat exchanger - gravel heat exchanger
	<b>Material:</b>	HDPE
	<b>Compressure resistance:</b>	750 N
	<b>Colour:</b>	- external: green - internal: natural
	<b>∅ ext. [mm] - coils:</b>	110; 160; 234
	<b>Coil length [m]:</b>	25, 50
	<b>Notes:</b>	* Possibility of producing pipe with a different length * Possibility of producing pipe with an individual overprint * Possibility of producing pipe in any colour and with different strength parameters

	∅ ext.	index	coil length
<b>COILS</b>	110	11809	25
	110	11810	50
	160	11811	25
	234	11812	25

\* product available on request at the minimum production requirement

