











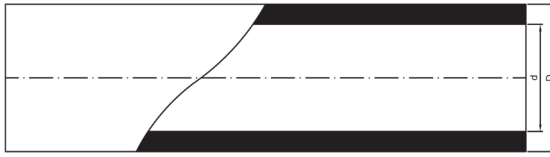


Pipes for gas supply systems - PE 100 TT-GAZ



	Reference documents:	PN-EN 1555-2:2021-12, NATIONAL TECHNICAL ASSESSMENT OF THE OIL AND GAS INSTITUTE (INiG) ZETOM SAFETY MARK, NATIONAL CERTIFICATE OF CONSTANCY OF PERFORMANCE
	PKWiU [Polish Classification of Products and Services]:	22.21.21.0
	Customs code:	3917 21 10
	Application:	- construction of the gas supply systems - supply of gaseous fuels - other purposes
	Material:	PE 100
	Nominal pressure (PN):	MOP 10 (SDR11); MOP 6 (SDR17; 17,6);
	SN:	SN 80 (SDR 11); SN 20 (SDR 17); SN 16 (SDR 17,6)
	Colour:	yellow, orange
	Ø ext. [mm] - bars:	90; 110; 125; 140; 160; 180; 200; 225; 250; 280; 315; 355; 400; 450; 500; 560; 630
	Bar length [m]:	12
	Notes:	* Possibility of producing pipe with a different length * Possibility of producing 90 and 110 diameter pipes in coil

* product available on request at the minimum production requirement

** EN 1555-2:2021-12 refers to SDR 11 and SDR 17 in Table No 2. In some countries, SDR 17.6 is defined.



*Pipes for gas supply systems - PE 100 TT-GAZ

Single layer (yellow or orange)

		SDR-17,6		SDR-17		SDR-11			
	∅ ext.	▲ wall thickness	☐ index	▲ wall thickness	☐ index	▲ wall thickness	☐ index	bar length	bulk packaging
BARS	90	5,2	12326	5,4	12343	8,2	12360	12	32/384
	110	6,3	12327	6,6	12344	10,0	12361	12	26/312
	125	7,1	12328	7,4	12345	11,4	12362	12	38/456
	140	8,0	12329	8,3	12346	12,7	12363	12	38/456
	160	9,1	12330	9,5	12347	14,6	12364	12	20/240
	180	10,3	12331	10,7	12348	16,4	12365	12	17/204
	200	11,4	12332	11,9	12349	18,2	12366	12	14/168
	225	12,8	12333	13,4	12350	20,5	12367	12	11/132
	250	14,2	12334	14,8	12351	22,7	12368	12	11/132
	280	15,9	12335	16,6	12352	25,4	12369	12	4/48
	315	17,9	12336	18,7	12353	28,6	12370	12	3/36
	355	20,2	12337	21,1	12354	32,3	12371	12	3/36
	400	22,8	12338	23,7	12355	36,3	12372	12	3/36
	450	25,6	12339	26,7	12356	40,9	12373	12	2/24
	500	28,4	12340	29,7	12357	45,4	12374	12	2/24
	560	31,9	12341	33,2	12358	50,8	12375	12	2/24
630	35,8	12342	37,4	12359	57,2	12376	12	2/24	

* product available on request at the minimum production requirement