



## \*System pipes for ground-coupled heat pumps - PE 100-RC

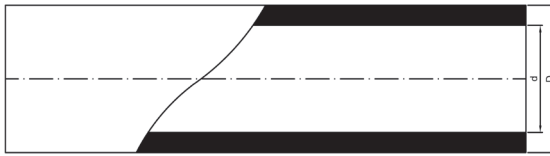

	<b>Reference documents:</b>	PN-EN 12201-2+A1:2013-12
	<b>PKWiU [Polish Classification of Products and Services]:</b>	22.21.21.0
	<b>Customs code:</b>	3917 21 10
	<b>Application:</b>	- supply of glycol - construction of ground collectors for underground heat pump systems - other purposes
	<b>Material:</b>	PE 100-RC
	<b>Nominal pressure (PN):</b>	PN 16 (SDR 11); PN 12,5 (SDR 13,6) ; PN 10 (SDR 17)
	<b>SN:</b>	SN 80 (SDR 11); SN 40 (SDR 13,6); SN 20 (SDR 17)
	<b>Colour:</b>	- black with a colour marker - black
	<b>Ø ext. [mm] - coils:</b>	32; 40
	<b>Coil length [m]:</b>	200
	<b>Notes:</b>	* Possibility of producing pipe with a different coil length * Possibility of producing pipe with an individual overprint * Possibility of producing pipe with different pipe diameters

		SDR-17		SDR-13,6		SDR-11			
	Ø ext.	▲ wall thickness	☰ index	▲ wall thickness	☰ index	▲ wall thickness	☰ index	coil length	bulk packaging
<b>COILS</b>	32	2,0	11281	2,4	11283	3,0	11285	200	1400
	40	2,4	11282	3,0	11284	3,7	11286	200	1000

\* product available on request at the minimum production requirement

